Wall-mounted eye/face wash

SS 50 Series

Product Description

This wall-mounted eye/face wash is engineered to provide immediate decontamination of the eyes and face in hazardous work environments, ensuring maximum user safety and compliance with international standards. Manufactured from AISI 316 or 304 stainless steel, the unit fixes to the wall with a flanged bracket and is activated by a simple push handle. It delivers a continuous flow of 11.4 litres per minute for a minimum of 15 minutes through twin brass spray nozzles into a 300 mm diameter bowl. Certified to meet ANSI/ISEA Z358.1 & EN 15154-2, it is ideal for laboratories, workshops and process plants.



Features & Benefits

- Push handle activation for fast, easy operation
- Twin brass spray nozzles with protective dust covers
- Large Ø300 mm stainless steel eyewash bowl
- Continuous flow of 11.4 L/min for a minimum of 15 minutes
- High corrosion resistance, AISI 316 or 304 stainless steel
- Compact flanged wall mounting
- Compliance with ANSI and EN standards
- Optional accessories:
  Thermostatic valve, freeze protection, eyewash cover, Alarm and signalling devices

Specifications

MATERIALS OF CONSTRUCTION	
Pipe Work & Fittings	*Stainless Steel 316 / 304*
Eyewash Bowl	*Stainless Steel 316 / 304, Ø300 mm*
Spray Nozzles / Dust Covers	*Brass / Plastic*
SERVICES	
Water Inlet / Outlet	*1/2" Inlet / 1 1/4" Outlet*
Operating Pressure	*1.4 - 2.8 BAR*
Flow Rate	*11.4 Liter Per min*
AMBIENT OPERATING TEMPERATURE	
Minimum-Maximum	*0-55 ℃*
STANDARDS COMPLIANCE	
American National Standard	*ANSI/ISEA Z358.1-2014*
European Standard	*EN 15154-2*
DIMENSIONS & WEIGHT	
Dimensions (Projection x Bowl Height)	*250 X 1080 mm*
Weight	*4.5 kg*
OPERATION	
Eye/Face Wash	*Push handle*

General Arrangement Drawing

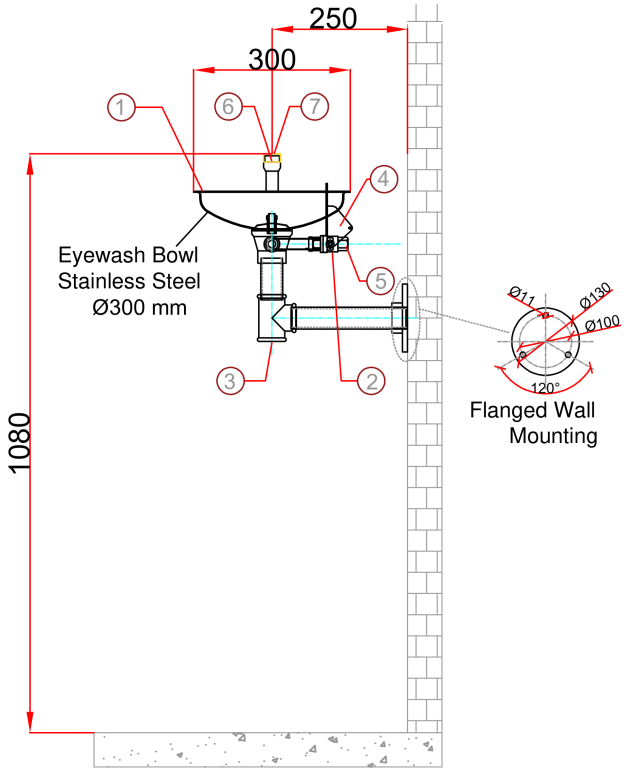

Standards: EN 15154-2,
ANSI/ISEA Z358.1-2014
Water Flow: 11.4 L/min
Weight: 4.5 kg
Package Dimensions: 32 x 32 x 23 cm

Static Test Pressure: 7 bar
Min Working Pressure: 1.4 bar
Max Working Pressure: 2.8 bar

NO.	DESCRIPTION	MATERIAL
7	Yellow Dust Cover	Plastic
6	Spray Nozzles	Brass
5	1/2" Water Inlet	Stainless Steel 316 / 304
4	Eyewash Push Handle	Stainless Steel 316 / 304
3	1 1/4" Water Outlet	Stainless Steel 316 / 304
2	1/2" Ball Valve	Stainless Steel 316 / 304
1	Eyewash Bowl (Ø300 mm)	Stainless Steel 316 / 304

SAVA SAFETY

Sava Safety Showers FZ-LLC
S09–10, Al Hamra Industrial Free Zone
Ras Al Khaimah, UAE

E: info@sava-safety.ae
W: https://sava-safety.ae
T: +971 4 501 1360